ORDER

SOLARLUX®

SL 45

Position _____ / _____

Required delivery week: _____

1. Number of units

_____ pieces

2. Stacking

◯ Inside
◯ Outside

3. Number of panels (inside view)

_____ left direction

_____ right direction

4. Glass

◯ with: _____

◯ prepared for _____ mm

5. Surface
Profile

RAL _____

or
Profile Eloxal

_____

Hinge:

RAL ◯ 9016 ◯ 9006
◯ 9007 ◯ 8077

◯ Special colour

RAL _____
(additional charge)

Flat handle:

RAL ◯ 9016 ◯ 9006
◯ 9007 ◯ 8077

◯ in Special colour

RAL _____
(additional charge)

Client:	Ref:
	Quotation number:
	Delivery address (if different to client):
Tel: / Fax:	
Contact person	

6. Hardware types ATTENTION! For **parapet installations:** Handle height from frame underside _____ mm

◯ Flat handle on inside without lock (standard)

◯ Flat handle indide/outside with profile cylinder (only possible with pair panel)

◯ Lever HEWI handle inside/outside with key cylinder (only possible on first opening swing panels)



7. Floor track options (Examples are to be found on www.solarlux.com)

◯ **5-45-02-x**



Drainage ◯ yes ◯ no

◯ **5-45-43-x**

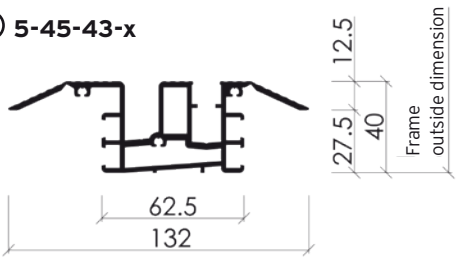

No factory installed drainage

◯ **5-50-23-x**



No factory installed drainage

8. Drawing

Elevation from inside

External frame size (with): _____ mm

number of panels and opening direction

External frame size (height): _____ mm

Outside

Plan view _____

Inside

panel shown in open position (stacking position)

03/2007 - subject to technical changes without notice