



Overview SL 45		
Glass thickness	Glass bead	Sealing
5-20 mm		
5	5-0-907-x	25-0-1005-x
6	5-0-907-x	25-0-1004-x
7	5-0-906-x	25-0-1006-x
8	5-0-906-x	25-0-1005-x
9	5-0-906-x	25-0-1005-x
10	5-0-906-x	25-0-1004-x
14	5-0-910-x	25-0-1005-x
18	5-0-903-x	25-0-1005-x
20	5-0-903-x	25-0-1004-x

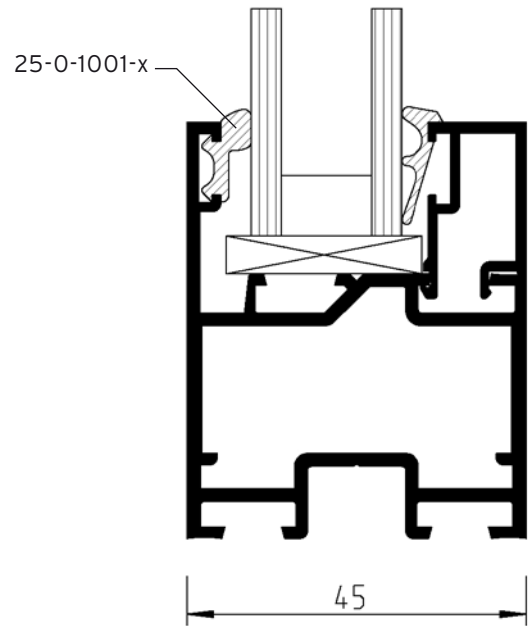

Overview SL 45 t/t		
Glass thickness	Glass bead	Sealing
5-20 mm		
5	5-0-909-x	25-0-1005-x
6	5-0-909-x	25-0-1003-x
7	5-0-908-x	25-0-1007-x
8	5-0-908-x	25-0-1006-x
9	5-0-908-x	25-0-1006-x
10	5-0-908-x	25-0-1006-x
14	5-0-907-x	25-0-1005-x
18	5-0-906-x	25-0-1005-x
20	5-0-910-x	25-0-1007-x

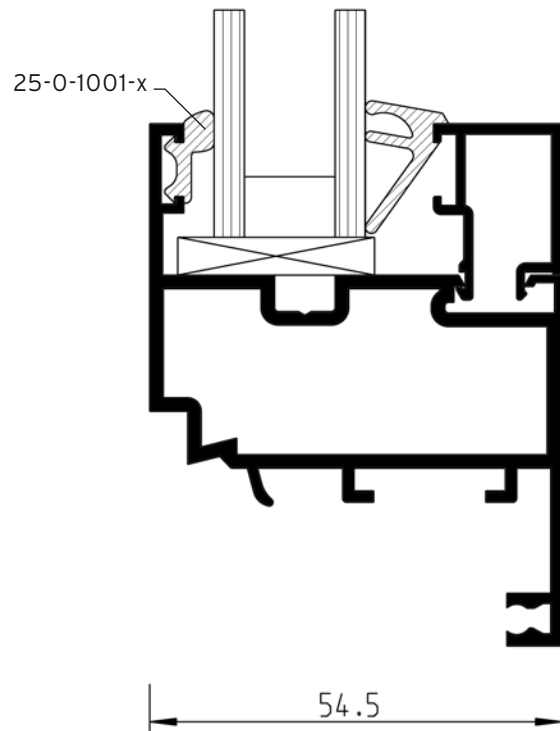

<p>Ared = Seen face (Surface aluminium outside) in mm</p> <p>Amech = Mechanically treated face in mm (primary face)</p>	<p>— · · · — · · · — · · · — = High standard finish area or machined area</p> <p>— — — — — = Standard finish area (secondary face)</p>
---	--

