Glazing Overview SL 45

Folding façade

Overview SL 45		
Glass thickness	Glass bead	Sealing
5-20 mm		
5	5-0-907-x	25-0-1005-x
6	5-0-907-x	25-0-1004-x
7	5-0-906-x	25-0-1006-x
8	5-0-906-x	25-0-1005-x
9	5-0-906-x	25-0-1005-x
10	5-0-906-x	25-0-1004-x
14	5-0-910-x	25-0-1005-x
18	5-0-903-x	25-0-1005-x
20	5-0-903-x	25-0-1004-x

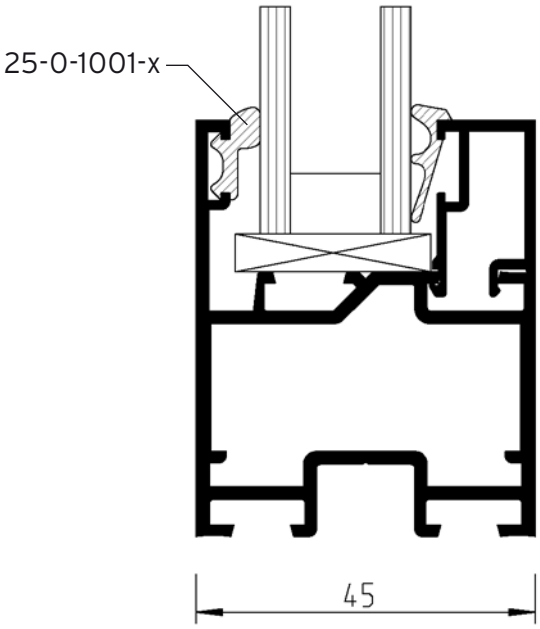

Overview SL 45 t/t		
Glass thickness	Glass bead	Sealing
5-20 mm		
5	5-0-909-x	25-0-1005-x
6	5-0-909-x	25-0-1003-x
7	5-0-908-x	25-0-1007-x
8	5-0-908-x	25-0-1006-x
9	5-0-908-x	25-0-1006-x
10	5-0-908-x	25-0-1006-x
14	5-0-907-x	25-0-1005-x
18	5-0-906-x	25-0-1005-x
20	5-0-910-x	25-0-1007-x

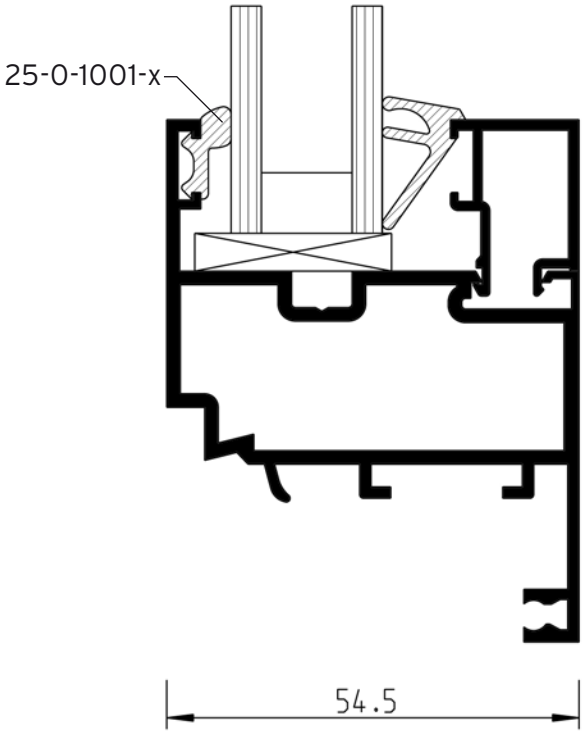

Ared = Seen face (Surface aluminium outside) in mm	—·—·—·— = High standard finish area or machined area
Amech = Mechanically treated face in mm (primary face)	— — — — = Standard finish area (secondary face)

Glazing Overview SL 45

Folding façade

Glass sealing
25-0-1004-x

Installation: 2,5 - 3,5 mm

Glass sealing
25-0-1005-x

Installation: 3,5 - 5,5 mm

Glass sealing
25-0-1006-x

Installation: 5,5 - 7,5 mm

Glass sealing
25-0-1007-x

Installation: 7,5 - 9 mm

Glazing bar profile 13mm
5-0-903-x

A_{red} = 136 mm
A_{mech} = 33 mm



Glazing bar profile 17mm
5-0-910-x

A_{red} = 148 mm
A_{mech} = 37 mm



Glazing bar profile 23mm
5-0-906-x

A_{red} = 180 mm
A_{mech} = 43 mm



Glazing bar profile 27.5mm
5-0-907-x

A_{red} = 186 mm
A_{mech} = 48 mm



Glazing bar profile 30.5mm
5-0-908-x

A_{red} = 196 mm
A_{mech} = 51 mm



Glazing bar profile 37mm
5-0-909-x

A_{red} = 209 mm
A_{mech} = 57 mm

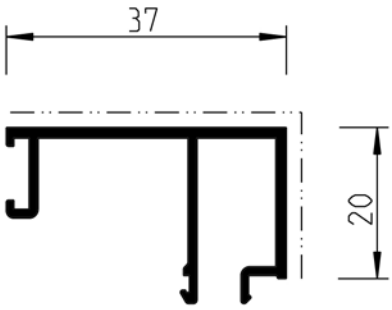

Ared = Seen face (Surface aluminium outside) in mm Amech = Mechanically treated face in mm (primary face)	—·—·—·— = High standard finish area or machined area — — — — = Standard finish area (secondary face)